


Roulement conique

X30310M-Y30310RM-TIMKEN - X30310M-Y30310RM-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/x30310m-y30310rm-timken>

TAPERED ROLLER BEARINGS

TYPE TSF

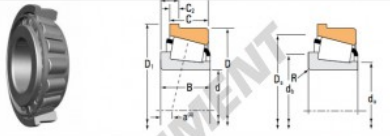

| Bearing Dimensions | | | | Load Ratings | | | | | | Part Number | |
|--------------------|-----------|------------|--|-----------------------------|---|-----------------------------|--------------------------|---------|----------|-------------|--|
| Bore d | O.D. D | Width B | Dynamic ⁽¹⁾ C ₁ | Factors ⁽¹⁾ e | Dynamic ⁽²⁾ C ₀₂ | Factors ⁽²⁾ K | Static C ₀ | Inner | Outer | | |
| mm | mm | mm | N | | N | N | N | | | | |
| 50 | 110 | 27 | 14500 | 0.25 | 3500 | 2200 | 16000 | X30310M | Y30310RM | | |
| 1.9685 | 4.3307 | 1.0629 | 34400 | | 8800 | 5110 | 30000 | | | | |

| Bearing Dimensions | | | | Shaft | | Housing | | Geometry Factors | | | Bearing Weight |
|--------------------|------------|-----------------------------|--|-----------------------------------|---|--|--|------------------|----------------|----------------|----------------|
| Width B | Width C | Eff. Dia. d ₁ | Outer Ring Ridge O.D. D ₁ | Flange Width C ₁ | Max Shaft File Radius (R ⁽¹⁾) | Sealing Shoulder Dia. d ₂ | Sealing Shoulder Dia. D ₂ | G ₁ | G ₂ | C ₂ | kg |
| mm | mm | mm | mm | mm | mm | mm | mm | | | | lbs. |
| 27 | 23 | 4.1 | 116.000 | 5.000 | 2.3 | 51.0 | 65.0 | 196.0 | 10.0 | 11.5 | 0.0007 |
| 1.0629 | 0.9055 | 0.24 | 4.5669 | 0.1969 | 0.10 | 2.00 | 2.56 | 4.89 | | | 1.56 |
| | | | | | | | | | | | 2.87 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952337470 |
| Diam. intérieur | 50 mm |
| Diam. extérieur | 110 mm |
| Épaisseur | 27 mm |
| Poids | 500 g |
| Conditionnement | - |
| Norme | - |

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE