


## Roulement à aiguilles GBRI162820-UU-IKO - GBRI162820-UU-IKO

<https://www.123roulement.be/roulement-palier/roulement-aiguilles/aiguilles/gbri162820-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

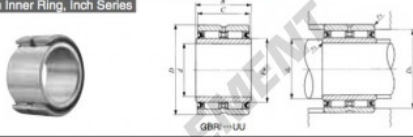

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		<i>d</i>	<i>D</i>	<i>C</i>			
25.400 (1)	<b>GBRI 162820 UU</b>		220	25.400 (1)	44.450 (1.75)	31.750 (1.25)			
<i>B</i>	<i>F<sub>w</sub></i>	Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C<sub>0</sub></i> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
		Min. <i>d<sub>s</sub></i>	Max. <i>d<sub>s</sub></i>	Max. <i>D<sub>s</sub></i>					<i>r<sub>as max</sub></i> <sup>(1)</sup>
32.000	31.750 (1.25)	30.5	30.7	39.6	0.6	46 600	83 900	2 500	<b>LRBZ 162020</b>

Notes: (1) Minimum allowable value of chamfer dimension *r*.  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383361
Diam. intérieur	25.4 mm
Diam. extérieur	44.45 mm
Épaisseur	31.75 mm
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE