


Roulement à aiguilles GBR1243920-UU-IKO - GBR1243920-UU-IKO

<https://www.123roulement.be/roulement-palier/roulement-aiguilles/aiguilles/gbri243920-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

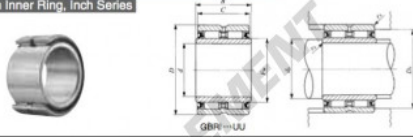

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		<i>d</i>	<i>D</i>	<i>C</i>			
38.100 (1 1/2)	GBR1 243920 UU		400	38.100 (1 1/2)	61.912 (2 1/2)	31.750 (1 1/4)			
<i>B</i>	<i>F_w</i>	Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min.	Max.	<i>r_{as max}</i> ⁽¹⁾					
32.000	47.625 (1 7/8)	43.3	45	56.2	1	61 100	121 000	1 700	LRBZ 243020

Notes: (1) Minimum allowable value of chamfer dimension *r*
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383477
Diam. intérieur	38.1 mm
Diam. extérieur	61.912 mm
Épaisseur	31.75 mm
Conditionnement	1

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE