


## Roulement à aiguilles GBRI284828-UU-IKO - GBRI284828-UU-IKO

<https://www.123roulement.be/roulement-palier/roulement-aiguilles/aiguilles/gbri284828-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

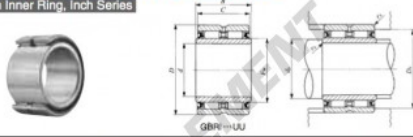

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		$d$	$D$	$C$			
44.450 (1 3/4)	GBRI 284828 UU		860	44.450 (1 3/4)	76.200 (3)	44.450 (1 3/4)			
$B$	$F_w$	Standard mounting dimensions mm			Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
		Min.	Max.	$r_{as max}$ <sup>(1)</sup>					
44.700	57.150 (2 1/4)	52.5	55	69.2	1.5	87 500	161 000	1 400	LRBZ 283628

Notes: (1) Minimum allowable value of chamfer dimension  $r$   
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This roller ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383514
Diam. intérieur	44.45 mm
Diam. extérieur	76.2 mm
Épaisseur	44.45 mm
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE