


## Galet de came avec axe CFE18-VB-IKO - CFE18-VB-IKO

<https://www.123roulement.be/roulement-palier/roulement-bille/galet-came-axe/cfe18-vb-iko>

IKO

### CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

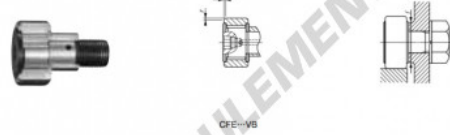

| Outside diameter of eccentric roller<br>mm | Identification number   |                             |                         |                             | Mass (Ref.) |    |    |                |
|--|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------|----|----|----------------|
|  | Shield type             |                             | Sealed type             |                             | Ø           | D  | C  | d <sub>e</sub> |
|  | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring |             |    |    |                |
| 24   | CFE 18 VB               |                             |                         |                             | 285         | 40 | 20 | 24             |

| Boundary dimensions, mm |                |                       |                       |                |                |   |                                      |                 |                                      |  |  |  |        |        |        |
|-------------------------|----------------|-----------------------|-----------------------|----------------|----------------|---|--------------------------------------|-----------------|--------------------------------------|--|--|--|--------|--------|--------|
| G                       | B <sub>3</sub> | B <sub>1</sub><br>max | B <sub>2</sub><br>max | C <sub>1</sub> | G <sub>1</sub> | H | H <sub>max</sub><br>( <sup>1</sup> ) | f<br>Min.<br>mm | Maximum<br>splicing<br>torque<br>N·m | Basic dynamic<br>load rating<br>C<br>N | Basic static<br>load rating<br>C <sub>0</sub><br>N | Maximum<br>allowable<br>static load<br>N |        |        |        |
| M18×1.5                 | 17.5           | 21.6                  | 58.1                  | 36.5           | 0.8            | 6 | 19                                   | 8               | 1                                    | 0.8                                    | 29   | 86.2                                     | 25 300 | 51 300 | 31 100 |

## CARACTÉRISTIQUES PRODUIT

|                 |               |
|-----------------|---------------|
| Marque          | IKO           |
| N° Ean13        | 3616060460585 |
| Diam. intérieur | 24 mm         |
| Diam. extérieur | 40 mm         |
| Épaisseur       | 20 mm         |
| Poids           | 285 g         |
| Conditionnement | 1             |

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE