


## Galet de came avec axe CFE30-V-IKO - CFE30-V-IKO

<https://www.123roulement.be/roulement-palier/roulement-bille/galet-came-axe/cfe30-v-iko>

**IKO**  
**CAM FOLLOWERS**  
Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

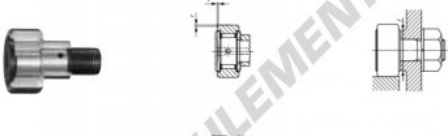

| Outside diameter of eccentric axle<br>mm | Identification number   |                             |                         |                             | Mass (Ref.)<br>g | D  | C  | d <sub>e</sub> |
|--|-------------------------|-----------------------------|-------------------------|-----------------------------|------------------|----|----|----------------|
|  | Shield type             |                             | Sealed type             |                             |                  |    |    |                |
|  | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring |                  |    |    |                |
| 41                                       | <b>CFE 30 V</b>         |                             |                         |                             | 2 030            | 80 | 35 | 41             |

| Boundary dimensions mm |                |          |                       |                |                |                |                |                       |                       | Eccentricity<br>E | Mounting clearance<br>f<br>Min.<br>mm | Maximum operating torque<br>N·m | Basic dynamic load rating<br>C<br>N | Basic static load rating<br>C <sub>0</sub><br>N | Maximum allowable static load<br>N |
|------------------------|----------------|----------|-----------------------|----------------|----------------|----------------|----------------|-----------------------|-----------------------|-------------------|---------------------------------------|---------------------------------|-------------------------------------|---|------------------------------------|
| G                      | B <sub>3</sub> | B<br>max | B <sub>1</sub><br>max | B <sub>2</sub> | C <sub>1</sub> | g <sub>1</sub> | G <sub>1</sub> | r <sub>1</sub><br>min | r <sub>2</sub><br>min |                   |                                       |                                 |                                     |   |                                    |
| M30 × 1.5              | 32.5           | 37       | 100                   | 63             | 1              | 8              | 30.5           | 1                     | 1.5                   | 49                | 438                                   | 67 700                          | 144 000                             | 85 900  |                                    |

### CARACTÉRISTIQUES PRODUIT

|                 |               |
|-----------------|---------------|
| Marque          | IKO           |
| N° Ean13        | 3616060461315 |
| Diam. intérieur | 41 mm         |
| Diam. extérieur | 80 mm         |
| Épaisseur       | 35 mm         |
| Poids           | 2030 g        |
| Conditionnement | 1             |

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE