Rotule SA
BRM20-00-502-DURBAL - BRM20-00-502-DURBAL

https://www.123roulement.be/roulement-palier/rotule/sa/brm20-00-502-durbal

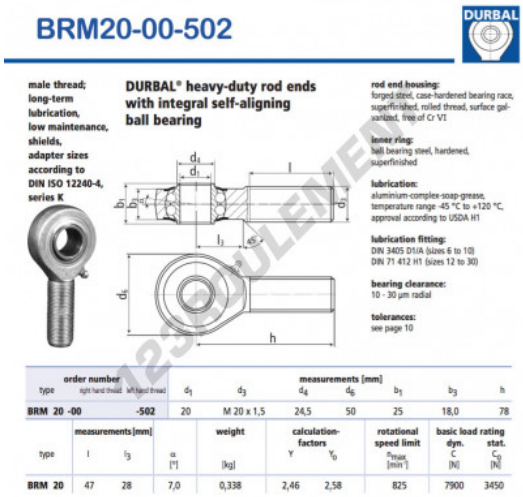

BRM20-00-502

DURBAL

male thread; long-term lubrication, low maintenance, shields, adapter sizes according to DIN ISO 12240-4, series K

DURBAL® heavy-duty rod ends with integral self-aligning ball bearing

rod end housing: forged steel, case-hardened bearing race, superfinished, rolled thread, surface galvanized, free of Cr VI

inner ring: ball bearing steel, hardened, superfinished

lubrication: aluminium-complex-soap-grease, temperature range -45 °C to +120 °C, approval according to USDA H1

lubrication fitting: DIN 3405 D1/A (sizes 6 to 10) DIN 71 412 H1 (sizes 12 to 30)

bearing clearance: 10 - 30 µm radial

tolerances: see page 10

order number type	right hand thread	left hand thread	measurements [mm] d_1	d_3	d_4	d_6	b_1	b_3	h
BRM 20 -00		-502	20	M 20 x 1,5	24,5	50	25	18,0	78

type	measurements [mm] l	l_3	α [°]	weight [kg]	calculation-factors Y	Y_0	rotational speed limit n_{max} [min⁻¹]	basic load rating dyn. C [N]	stat. C_0 [N]
BRM 20	47	28	7,0	0,338	2,46	2,58	825	7900	3450

CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952507064
Diam. intérieur	20 mm
Diam. extérieur	50 mm
Epaisseur	25 mm
Type	-
Poids	338 g
Filetage	-
Lubrification	-
Conditionnement	-
Norme	-

contact@123roulement.be
02 808 18 02
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE