


Rotule SI

BRF25-00-502-DURBAL - BRF25-00-502-DURBAL

<https://www.123roulement.be/roulement-palier/rotule/si/brf25-00-502-durbal>

BRF25-00-502

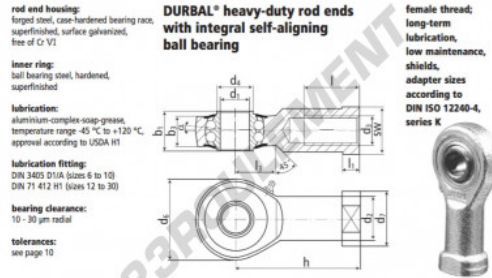

rod end housing:
forged steel, case-hardened bearing race, superfinished, surface galvanized, free of Cr VI.

inner ring:
ball bearing steel, hardened, superfinished.

lubrication:
aluminium-complex-soap-grease, temperature range -45 °C to +120 °C, approval according to USDA H1

lubrication fitting:
DIN 3405 D1/A (sizes 6 to 10)
DIN 71 412 H1 (sizes 12 to 30)

bearing clearance:
10 - 30 µm radial

tolerances:
see page 10

DURBAL® heavy-duty rod ends with integral self-aligning ball bearing

female thread:
long-term lubrication, low maintenance, shields, adapter sizes according to DIN ISO 12240-4, series K



order number		measurements [mm]												
type	type	d ₁	d ₂	d ₃	d ₄	d ₅	d ₇	b ₁	b ₂	h	l	l ₁	l ₂	SW
BRF 25 -00	-502	25	30,0	M 24 x 2	29,5	64	35	31	22,0	94				
type	measurements [mm]	weight	calculation factors	rotational speed limit	basic load rating	stat.								
BRF 25	42 10,0 32 30	5,0	0,572	2,02 2,12	600	11030 5680								

CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952507323
Diam. intérieur	25 mm
Diam. intérieur	0.984" inch
Diam. extérieur	64 mm
Diam. extérieur	2.52" inch
Epaisseur	31 mm
Epaisseur	1.22" inch
Type	SI
Poids	572 g
Filetage	Filetage à gauche
Lubrification	avec
Conditionnement	1

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE