

## Rotule SI

### BRF1-1-01-501-DURBAL - BRF1-1-01-501-DURBAL

<https://www.123roulement.be/roulement-palier/rotule/si/brf1-1-01-501-durbal>

#### BRF1/1-01-501



**rod end housing:**  
forged steel, case-hardened bearing race, superfinished, surface galvanized, free of Cr VI

**inner ring:**  
ball bearing steel, hardened, superfinished

**lubrication:**  
aluminum complex soap-grease, temperature range -45 °C to +120 °C, approval according to USDA H1


**lubrication fitting:**  
DIN 3405 D1/A (sizes 1/4 and 3/8)  
DIN 71 412 H1 (sizes 1/2 and 1 1/4)

**bearing clearance:**  
10 - 30 µm radial

**tolerances:**  
see page 10

**DURBAL® heavy-duty rod ends with integral self-aligning ball bearing**

**female thread:**  
long-term lubrication, low maintenance, shields, dimensions in inches

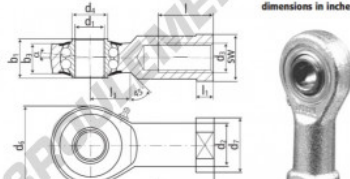

order number	measurements [inches]											
	type	right hand thread	left hand thread	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub> Class 2	d <sub>4</sub>	d <sub>5</sub>	d <sub>6</sub>	d <sub>7</sub>	b <sub>1</sub>	b <sub>2</sub>
BRF 1/1 -01 -501			1.000	1.171	1.0000-14 UNS	1.161	2.519	1.377	1.220	.866		
type	measurements [inches]				weight [kg]	calculation factors Y	rotational speed limit n <sub>max</sub> [rpm]	basic load rating				
	h	l	l <sub>1</sub>	l <sub>2</sub>				C [N]	C <sub>0</sub> [N]			
BRF 1/1	3.720	1.653	.236	1.279	1.181	5.0	0.570	2.02	2.12	600	11030	5680

## CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952510224
Diam. intérieur	25.4 mm
Diam. extérieur	63.98 mm
Epaisseur	30.99 mm
Type	SI
Poids	570 g
Filetage	Filetage à droite
Lubrification	avec
Conditionnement	1
Norme	Sans norme

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE