


## Douille à aiguilles BHAM2824-IKO - BHAM2824-IKO

<https://www.123roulement.be/roulement-palier/roulement-aiguilles/douille/bham2824-iko>

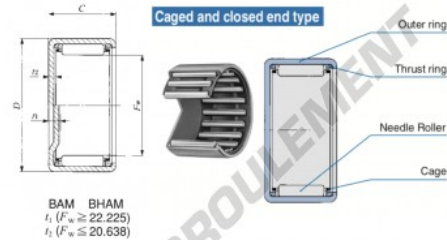

BAM BHAM  
 $f_1 (F_w \geq 22.225)$   
 $f_1 (F_w \leq 20.638)$

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Minimum axial clearance	Maximum axial clearance
$F_w$	$B$	$C$	$f_1$	$f_2$	Shk. dia.	Housing bore dia.	$C$	$C_0$	mm(°)	Outer ring
			Max.	Min.	Min.	Max.	Min.	Min.	Max.	(µm)
44.450 (1.748)	57.150 (2.250)	38.100 (1.500)	3.0	45.490	44.450	57.150 (2.250)	72000	135000	7000 (275)	1000 (39.4)

## CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060600875
Diam. intérieur	44.45 mm
Diam. extérieur	57.15 mm
Epaisseur	38.1 mm
Vitesse limite	7500 rpm
Charge dynamique	72.2 kN
Charge statique	135 kN
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE