


Roulement à aiguilles BHKM1730JU-JTEKT - BHKM-1730-JU-KOYO

<https://www.123roulement.be/roulement-palier/roulement-aiguilles/aiguilles/bhkm-1730-ju-koyo>

Drawn cup needle roller bearings 

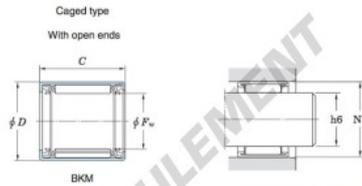

| Boundary dimensions (mm) | | | Basic load ratings (kN) | | Limiting speeds (min ⁻¹) | | Bearing No. ²⁾ | |
|--------------------------|-----|-----|-------------------------|----------|--------------------------------------|------------|---------------------------|-----------------|
| F_w | D | C | C_r | C_{10} | Oil lub. | Caged type | | |
| | | | | | | | With open ends | With closed end |
| 17 | 24 | 30 | 20.1 | 31.3 | 11 000 ¹⁾ | BHKM1730JU | | |

| Full complement type | | Recommended dimensions (mm) | | | | (Refer.) Mass (g) | |
|----------------------|-----------------|-----------------------------|--------|-----------------------------|--------|-------------------|-----------------|
| With open ends | With closed end | Shaft dia. (φ6) min. | max. | Housing bore dia. (N7) min. | max. | With open ends | With closed end |
| — | — | 16.989 | 17.000 | 23.972 | 23.993 | 35 | — |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | JTEKT |
| N° Ean13 | 4549250328763 |
| Diam. intérieur | 17 mm |
| Diam. extérieur | 24 mm |
| Épaisseur | 30 mm |
| Poids | 35 g |
| Conditionnement | 1 |
| Norme | Sans norme |

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE