


## Roulement à rouleaux NN3015K-JTEKT - NN3015K-JTEKT

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/rouleaux/nn3015k-jtekt>

Double-row cylindrical roller bearings ————— **Koyo**

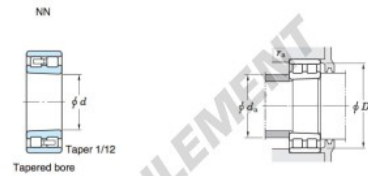

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r <sub>min</sub>	F <sub>w</sub>	E <sub>w</sub>	C <sub>r</sub>	C <sub>0r</sub>	Grease lub.	Oil lub.	NN Cylindrical bore Tapered bore
75	115	30	1.1	105	99.0	155		5 200	6 200	<b>NN3015K</b>

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	d <sub>a</sub>		D <sub>a</sub>		r <sub>s</sub>		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		81.5	—	—	108.5	106	1	1.11	1.08

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473734
Diam. intérieur	75 mm
Diam. extérieur	115 mm
Épaisseur	30 mm
Poids	1080 g
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE