
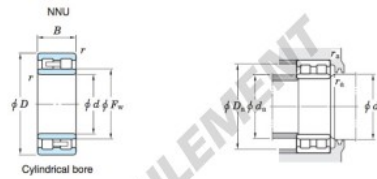


## Roulement à rouleaux NNU4922-JTEKT - NNU4922-JTEKT

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/rouleaux/nnu4922-jtekt>

Double-row cylindrical roller bearings 



Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
$d$	$D$	$B$	$r$ min.	$F_w$	$C_r$	$C_{0r}$	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
110	150	40	1.1	123	—	183	326	3 700	4 500	NN

Mounting dimensions (mm)		Mounting dimensions (mm)				(Refer.) Mass (kg)			
NNU		$d_s$		$D_s$		$r_s$			
Cylindrical bore	Tapered bore	min.	max.	min.	max.	Cylindrical bore	Tapered bore		
NNU4922		116.5	121	125	143.5	—	1	2.10	2.01

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473901
Diam. intérieur	110 mm
Diam. extérieur	150 mm
Épaisseur	40 mm
Poids	2100 g
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE