


Roulement à rouleaux NNU4922K-JTEKT - NNU4922K-JTEKT

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/rouleaux/nnu4922k-jtekt>

Double-row cylindrical roller bearings ——— Koyo

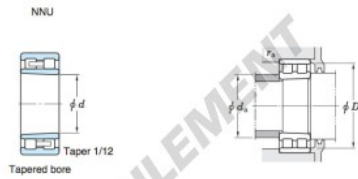

Boundary dimensions (mm)				Basic load ratings (kN)				Limiting speeds (min ⁻¹)		Bearing No.	
d	D	B	r _{min}	F _w	E _w	C _r	C _{0r}	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
110	150	40	1.1	123	—	163	326	3 700	4 500		

Mounting dimensions (mm)		Mounting dimensions (mm)				(Refer.) Mass (kg)			
NUU	NUU	d _a min.	d _a max.	D _a min.	D _a max.	r _a min.	r _a max.	Cylindrical bore	Tapered bore
Cylindrical bore	Tapered bore								
	NNU4922K	116.5	121	125	143.5	—	1	2.10	2.01

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473918
Diam. intérieur	110 mm
Diam. extérieur	150 mm
Épaisseur	40 mm
Poids	2010 g
Conditionnement	1

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE