
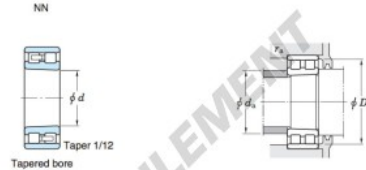


## Roulement à rouleaux NN3060K-JTEKT - NN3060K-JTEKT

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/rouleaux/nn3060k-jtekt>

Double-row cylindrical roller bearings 



Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
$d$	$D$	$B$	$r$ min.	$F_w$	$C_r$	$C_{0r}$	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
300	460	118	4	418	1 290	2 460	1 100	1 300		<b>NN3060K</b>

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	$d_a$		$D_a$		$r_a$		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		316	—	—	444	421	3	70.8	68.7

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952474014
Diam. intérieur	300 mm
Diam. extérieur	460 mm
Épaisseur	118 mm
Poids	68700 g
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE