


## Roulement à rouleaux NN3092K-JTEKT - NN3092K-JTEKT

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/rouleaux/nn3092k-jtekt>

### Double-row cylindrical roller bearings Koyo

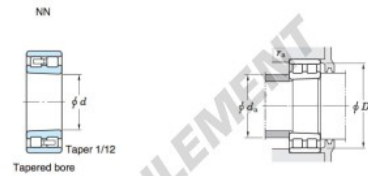

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> <sub>min.</sub>	<i>F</i> <sub>02</sub>	<i>C</i> <sub>02</sub>	<i>C</i> <sub>102</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
460	680	163	6	—	627	2 700	570	690	NN	NN3092K

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	<i>d</i> <sub>a</sub>		<i>D</i> <sub>a</sub>		<i>r</i> <sub>a</sub>		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		484	—	—	656	632	5	201	195

## CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952474212
Diam. intérieur	460 mm
Diam. extérieur	680 mm
Épaisseur	163 mm
Poids	195000 g
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE