


## Roulement conique 558-552A-TIMKEN - 558-552A-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/558-552a-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

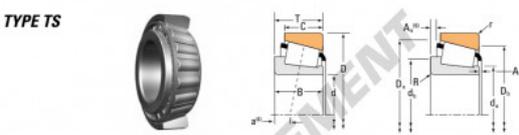

Bearing Dimensions			Load Ratings						Part Number		
Bore d	O.D. D	Width T	Dynamic <sup>1)</sup> C <sub>1</sub>	Factor <sup>2)</sup> Y	Dynamic <sup>3)</sup> C <sub>2</sub>	Factor <sup>4)</sup> X	Static C <sub>0</sub>	Inner	Outer		
mm	mm	mm	N		N		N				
60.325	123.825	38.100	22900	1.30	1.73	9800	26700	1.60	24800	558	552A
2.3750	4.8750	1.5000	12000			500	13500		12500		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage				
Width B	Width C	ER. Dr. α <sup>1)</sup>	Max. Shaft Fillet Radius r <sub>1</sub>	Backing Shoulder Dia. d <sub>1</sub>	Max. Housing Fillet Radius r <sub>2</sub>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>2)</sup>	A <sub>2</sub> <sup>3)</sup>	A <sub>3</sub> <sup>4)</sup>	G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>	kg	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				lb	
36.678	36.502	-0.4	2.3	72.8	36.8	3.3	116.8	108.8	2.3	1.3	91.0	21.1	0.1108	2.88
1.4440	1.4375	-0.37	0.09	2.83	2.99	0.13	4.57	4.29	0.09	0.05				4.57

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952318639
Diam. intérieur	60.325 mm
Diam. intérieur	2 3/8" inch
Diam. extérieur	123.825 mm
Diam. extérieur	4 7/8" inch
Epaisseur	38.1 mm
Epaisseur	1 1/2" inch
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE