


## Roulement conique

### M241547C-M241510-TIMKEN - M241547C-M241510-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/m241547c-m241510-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

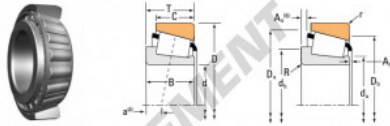

Bearing Dimensions			Load Ratings						Part Number		
Bore d	O.D. D	Width B	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Static <sup>(3)</sup> C <sub>2</sub>	Factor <sup>(4)</sup> K	Dynamic <sup>(5)</sup> C <sub>10</sub>	Factor <sup>(6)</sup> K	Static <sup>(7)</sup> C <sub>2</sub>	Inner	Outer
mm	mm	mm	N		N		N		N		
203.200	292.100	57.945	68900	2.32	1.60	17000	10000	1.78	117000	M241547C	M241510
8.000	11.500	2.2913	15000			4010	2280		20300		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage				
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max. Shaft Fillet Radius R <sub>f</sub> <sup>(2)</sup>	Backing Shoulder Dia. d <sub>s</sub> <sup>(3)</sup>	Max. Housing Fillet Radius r <sub>f</sub> <sup>(4)</sup>	Backing Shoulder Dia. D <sub>s</sub> <sup>(5)</sup>	A <sub>1</sub> <sup>(6)</sup>	A <sub>2</sub> <sup>(7)</sup>	A <sub>3</sub> <sup>(8)</sup>	A <sub>4</sub> <sup>(9)</sup>	G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>	kg
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				mm
57.945	46.696	-4.8	3.5	217.0	221.0	3.3	276.0	272.0	4.7	2.8	0.541	1.073	0.1278	12.04
2.2913	1.8125	-0.19	0.14	8.54	8.73	0.13	10.98	10.71	0.18	0.08				26.54

## CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952327136
Diam. intérieur	203.2 mm
Diam. extérieur	292.1 mm
Épaisseur	57.945 mm
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE