


## Roulement conique 688TD-672-TIMKEN - 688TD-672-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/688td-672-timken>

**TAPERED ROLLER BEARINGS**  
DOUBLE-ROW • TYPE TDIT

**TYPE TDIT**

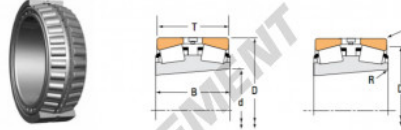

Bearing Dimensions				Load Ratings									
Bore d	Taper	O.D. D	Width T	Double Inner Ring Width B	Dynamic C <sub>10</sub>	e	Factor <sup>1)</sup> Y <sub>1</sub>	Y <sub>2</sub>	C <sub>0</sub>	Dynamic C <sub>90</sub>	C <sub>00</sub>	Factor <sup>2)</sup> K	
mm	°	mm	mm	mm	N	mm			N	N	N		
100.211 3.9433	1:15.2	168.275 6.6250	95.250 3.7500	95.250 3.7500	43000 67000	0.47	1.43	2.14	6400 14600	52000 117000	13000 25400	1.24	

Part Number		Dimensions			Geometry Factors			Bearing Weight
Inner	Outer	Max Shaft Fillet Radius r <sub>s</sub>	Max Housing Fillet Radius r <sub>h</sub>	Backing Shoulder Dia. D <sub>s</sub>	G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>	
mm	mm	mm	mm	mm				
688TD	672	0.8 0.03	3.3 0.13	146.8 5.87	182.5	37.3	0.1056	6.28 18.46

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952373263
Diam. intérieur	100.211 mm
Diam. extérieur	168.275 mm
Épaisseur	95.25 mm
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE