


Galet de roulement CRY64-VUU-IKO - CRY64-VUU-IKO

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/galet-roulement/cry64-vuu-iko>

IKO
ROLLER FOLLOWERS
Non-separable Roller Followers, Inch Series Full Complement Type /With Inner Ring

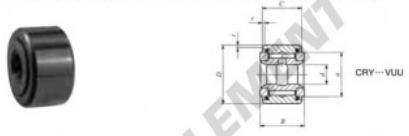

| Shaft dia. mm (inch) | Identification number | | Max (Ref.) g | Boundary dimensions: mm(inch) | | | | Basic dynamic load rating C _d N | Basic static load rating C ₀ N |
|----------------------------|---------------------------------------|---------------------------------------|-------------------------|-------------------------------|--|----------------|---|---|--|
| | Shield type Cylindrical outer ring | Sealed type Cylindrical outer ring | | d | D | B | C | | |
| 31.750 (1 1/4) | CRY 64 VUU | | 3 200 | 31.750 ^{1) 1/4} | 101.600 ^{1) 4} | 58.738(2.3125) | 57.150 ^{2) 1/4} | 142 000 | 317 000 |
| | | Shaft dia. | | | Basic dynamic load rating C _d | | Basic static load rating C ₀ | | |
| | | Push fit | | Drive fit | | Press fit | | | |
| | | Min. | Max. | Min. | Max. | Min. | Max. | | |
| | | 71.02(2.797) | 2.381 ^{1) 1/2} | 31.727 | 31.740 | 31.747 | 31.760 | 31.758 | 31.770 |

Remarks: 1. The inner ring has an oil hole.
2. Provided with prepacked grease.

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | IKO |
| N° Ean13 | 3663952398341 |
| Diam. intérieur | 31.75 mm |
| Diam. extérieur | 101.6 mm |
| Épaisseur | 58.738 mm |
| Conditionnement | 1 |

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE