


Galet de came avec axe CFE16-UU-IKO - CFE16-UU-IKO

<https://www.123roulement.be/roulement-palier/roulement-bille/galet-came-axe/cfe16-uu-iko>

IKO
CAM FOLLOWERS
Eccentric Type Cam Followers **With Cage/With Screwdriver Slot**

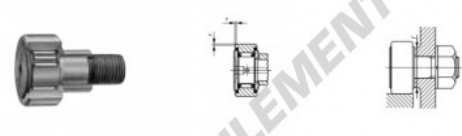

Outside diameter of eccentric roller, mm	Identification number				Mass (Ref.)								
	Shield type		Sealed type		ϕ	D	C	d_2					
22	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	CFE 16	UU	190	35	18	22			
Boundary dimensions, mm													
G	B ₃	B ₁ max	B ₂ max	C ₁	g ₁	G ₁	(1) r _{max}	Mounting dimension f, mm	Maximum tightening torque, N-m	Basic dynamic load rating, C, N	Basic static load rating, C ₀ , N	Maximum allowable static load, N	
M16×1.5	15.5	19.6	52.1	32.5	0.8	6	17	0.6, 0.8	26	58.5	12 000	18 300	18 300

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060459985
Diam. intérieur	22 mm
Diam. extérieur	35 mm
Épaisseur	18 mm
Poids	190 g
Conditionnement	1

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE