


Roulement à rouleaux NN3088K-JTEKT - NN3088K-JTEKT

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/rouleaux/nn3088k-jtekt>

Double-row cylindrical roller bearings

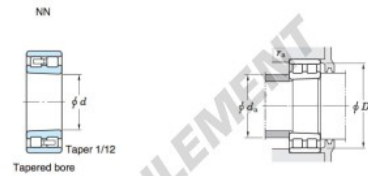

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No.	
d	D	B	r _{min}	F _w	C _r	C _{0r}	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
440	650	157	6	597	2 520	5 060	620	740	NN3088K	NN3088K

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	d _a		D _a		r _a		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		464	—	—	626	602	5	177	171

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952474199
Diam. intérieur	440 mm
Diam. extérieur	650 mm
Épaisseur	157 mm
Poids	171000 g
Conditionnement	1

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE