


## Roulement conique 4368-4335-TIMKEN - 4368-4335-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/4368-4335-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

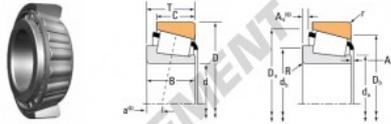

Bearing Dimensions			Load Ratings					Part Number			
Bore d	O.D. D	Width B	Dynamic <sup>(1)</sup> C <sub>d</sub>	Factor <sup>(2)</sup> K	Dynamic <sup>(1)</sup> C <sub>de</sub>	Factor <sup>(2)</sup> K	Static C <sub>s</sub>	Inner	Outer		
mm	mm	mm	N		N		N				
34.925	90.488	39.688	199000	2.70	2.11	51900	25300	2.05	294000	4300	4325
1.3750	3.5625	1.5625	44700			11600	5640		65800		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft		Housing		Cage					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>			
Width B	Width C	ER. Dr. μm	Max Shaft Fillet Radius R <sub>1</sub>	Backing Shoulder Dia. d <sub>1</sub>	Max Housing Fillet Radius r <sub>1</sub>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>(1)</sup>	A <sub>2</sub> <sup>(1)</sup>						
39.69	39.69	-15.8	3.5	48.8	55.8	3.3	85.8	77.8	2.2	8.6	52.9	14.3	0.9872	5.36
1.5625	1.5625	-0.59	0.14	1.93	2.17	0.13	3.35	3.03	0.09	0.03				2.81

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952310275
Diam. intérieur	34.93 mm
Diam. intérieur	1 3/8" inch
Diam. extérieur	90.49 mm
Diam. extérieur	3 9/16" inch
Epaisseur	39.69 mm
Epaisseur	1 9/16" inch
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE