


## Roulement conique 66585-66520-TIMKEN - 66585-66520-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/66585-66520-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

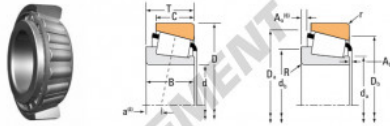

Bearing Dimensions			Load Ratings						Part Number		
Bore d	O.D. D	Width T	Dynamic <sup>1)</sup> C <sub>1</sub>	Factor <sup>2)</sup> e	Dynamic <sup>3)</sup> C <sub>2</sub>	Factor <sup>4)</sup> K	Static C <sub>0</sub>	Inner	Outer		
mm	mm	mm	N		N		N				
60 000	122.238	33.338	102000	2.87	6.56	42500	50100	0.88	178000	66585	66520
2.3622	4.8125	1.3125	43200			16700	12200		39800		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage				
Width B	Width C	ER. Dr. α <sup>1)</sup>	Max. Shaft Fillet Radius R <sub>1</sub>	Backing Shoulder Dia. d <sub>1</sub>	Max. Housing Fillet Radius r <sup>2)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>3)</sup>	A <sub>2</sub> <sup>4)</sup>	A <sub>3</sub> <sup>5)</sup>	G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>	kg	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm				mm	
31.766	25.812	2.6	3.5	73.8	75.8	3.3	116.8	105.0	5.2	2.8	17.0	18.3	0.0767	1.62
1.2500	0.9375	0.08	0.14	2.87	3.11	0.13	4.57	4.13	0.20	0.08				3.59

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952318547
Diam. intérieur	60 mm
Diam. extérieur	122.238 mm
Épaisseur	33.338 mm
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE