


## Roulement conique 6559C-6535-TIMKEN - 6559C-6535-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/6559c-6535-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

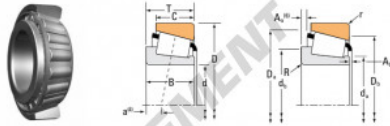

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> K	Dynamic <sup>(1)</sup> C <sub>02</sub>	Factor <sup>(2)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
82.550	161.925	53.975	42900	1.40	114000	20000	1.48	523000	6559C	6535
3.2500	6.3750	2.1250	18500		25000	13000		118000		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max Shaft Fillet Radius R <sub>1</sub>	Backing Shoulder Dia. d <sub>1</sub>	Max Housing Fillet Radius r <sup>(1)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>(1)</sup>	A <sub>2</sub> <sup>(1)</sup>	A <sub>3</sub> <sup>(1)</sup>					
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm					
55.180	42.862	-13.2	3.5	98.0	104.0	3.3	154.0	141.0	4.1	8.9	158.6	35.5	0.1037	5.87
2.1933	1.6875	-0.52	0.14	3.86	4.09	0.13	6.06	5.55	0.16	0.04				11.18

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952322520
Diam. intérieur	82.55 mm
Diam. extérieur	161.925 mm
Épaisseur	53.975 mm
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE