


## Roulement conique

### HH224335-HH224314-TIMKEN - HH224335-HH224314-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/hh224335-hh224314-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

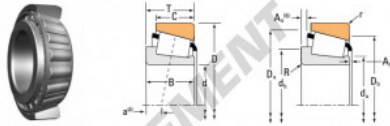

Bearing Dimensions			Load Ratings						Part Number		
Bore d	O.D. D	Width T	Dynamic <sup>1)</sup> C <sub>1</sub>	Factor <sup>2)</sup> Y	Dynamic <sup>3)</sup> C <sub>2</sub>	Factor <sup>4)</sup> X	Static C <sub>0</sub>	Inner	Outer		
mm	mm	mm	N		N		N				
101.600	214.975	64.798	60000	3.33	1.84	17000	9000	1.78	99000	HH224335	HH224314
4.0000	8.4630	2.5511	133000			3900	22700		20400		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
Width B	Width C	ER. Dr. e <sup>1)</sup>	Max. Shaft Fiber Radius R <sub>1</sub>	Shoulder Dia. d <sub>1</sub>	Max. Housing Fiber Radius r <sub>1</sub>	Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>2)</sup>	A <sub>2</sub> <sup>3)</sup>	Cage				Ag	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg				
66.675	58.800	-18.8	7.8	121.0	132.0	3.3	201.2	192.0	4.8	2.9	366.6	47.9	0.1182	11.18
2.6250	2.3000	-0.74	0.29	4.76	5.31	0.13	7.92	7.58	0.19	0.12				24.65

## CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952324296
Diam. intérieur	101.6 mm
Diam. intérieur	4" inch
Diam. extérieur	214.975 mm
Diam. extérieur	8.464" inch
Epaisseur	64.798 mm
Epaisseur	2.551" inch
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE