


# Roulement conique

## LM236749-LM236710A-TIMKEN - LM236749-LM236710A-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/lm236749-lm236710a-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

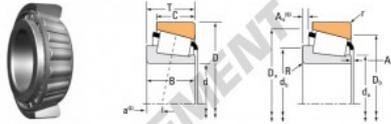

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> K	Dynamic <sup>(3)</sup> C <sub>02</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
184.150	235.229	34.000	20400	1.33	1700	4200	1.74	95000	LM236749	LM236710A
7.200	9.2610	1.3388	4300		1800	900		12400		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
Width B	Width C	ER. Dr. a <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(2)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max Housing Fillet Radius r <sup>(3)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>(4)</sup>	A <sub>2</sub> <sup>(5)</sup>	Cage				kg	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		
33.000	28.000	5.1	2.8	191.0	155.0	2.0	229.0	224.0	0.4	3.6	558.0	173.0	0.1303	3.38
1.2902	1.1024	0.20	0.08	7.62	7.68	0.08	9.02	8.82	0.01	0.15				7.45

## CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952326719
Diam. intérieur	184.15 mm
Diam. extérieur	235.229 mm
Épaisseur	34 mm
Poids	2000 g
Conditionnement	1
Norme	Sans norme

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE