


## Roulement conique

### EE291250-291750-TIMKEN - EE291250-291750-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/ee291250-291750-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

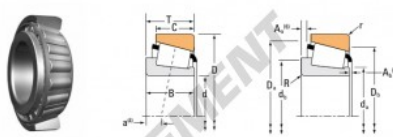

Bearing Dimensions			Load Ratings					Part Number		
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> e	Factor <sup>(3)</sup> Y	Dynamic <sup>(4)</sup> C <sub>02</sub>	Factor <sup>(5)</sup> K	Static C <sub>0</sub>	Inner	Outer
mm	mm	mm	N			N		N		
317.500	444.500	63.500	807000	2.30	1.58	230000	140000	1390000	EE291250	291750
12.5000	17.5000	2.5000	196500			51700	33000	312000		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing			Cage		G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
Width B	Width C	ER. Dr. α <sup>(6)</sup>	Max. Shaft Fillet Radius R <sup>(7)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max. Housing Fillet Radius r <sup>(8)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>(9)</sup>	A <sub>2</sub> <sup>(10)</sup>	mm	mm	mm	mm	mm	kg
61.912	36.688	7.8	0.8	354.0	346.0	1.5	415.0	416.0	11.4	3.1	1570.2	244.0	0.1507	24.98
2.4375	1.5625	0.30	0.31	13.15	13.62	0.06	16.24	16.38	0.45	0.28				55.11

## CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952329420
Diam. intérieur	317.5 mm
Diam. extérieur	444.5 mm
Épaisseur	63.5 mm
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE