


Roulement conique

X30309M-Y30309RM-TIMKEN - X30309M-Y30309RM-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/x30309m-y30309rm-timken>

TAPERED ROLLER BEARINGS

TYPE TSF

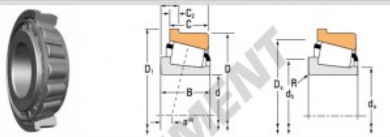

Bearing Dimensions										Load Ratings				Part Number	
Bore d	O.D. D	Width B	Dynamic ⁽¹⁾ C1	Factors ⁽¹⁾ e	Dynamic ⁽²⁾ C02	Factors ⁽²⁾ K	Static C0	Inner	Outer						
mm	mm	mm	N		N		N								
45	100	25	12500	0.35	23500	1.88	12800	X30309M	Y30309RM						
1.7717	3.9370	0.4015	29000		7530		31300								

Bearing Dimensions										Shaft			Housing			Geometry Factors			Bearing Weight
Width B	Width C	Eff. Dia. d1	Outer Ring Height D1	Flange Width C0	Max Shaft File Radius R1	Sealing Shoulder Dia. d2	Sealing Shoulder Dia. d3	Sealing Shoulder Dia. D1	Sealing Shoulder Dia. D2	G1	G2	C0						kg	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm										
25.000	22.000	-4.1	186.000	5.000	2.0	96.0	99.0	95.0	41.9	18.4	0.0851							1.06	
0.9943	0.8681	-0.24	4.7322	0.1989	0.08	2.20	2.32	2.24										2.31	

CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3616060457059
Diam. intérieur	45 mm
Diam. extérieur	100 mm
Épaisseur	25 mm
Poids	1016 g
Conditionnement	1
Norme	Sans norme

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE