


Roulement conique

HM252349-HM252310CD-TIMKEN - HM252349-HM252310CD-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/hm252349-hm252310cd-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TDO

TYPE TDO

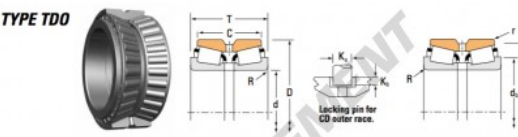

| Bearing Dimensions | | | | Load Ratings | | | | | | | |
|--------------------|---------|---------|---------------------------|--|--------------------------------------|--------------------------------------|--|--|--|-------------------------|--|
| Bore d | O.D. D | Width T | Double Outer Ring Width C | Dynamic ⁽¹⁾ C ₁₀ | Factor ⁽²⁾ Y ₁ | Factor ⁽²⁾ Y ₂ | Dynamic ⁽³⁾ C ₉₀ | Factor ⁽³⁾ C _{90a} | Dynamic ⁽³⁾ C ₅₀ | Factor ⁽³⁾ K | |
| mm | mm | mm | mm | N | | | N | N | N | | |
| 260.350 | 422.275 | 178.992 | 178.989 | 209000 | 0.33 | 2.03 | 401000 | 228000 | 606000 | 1.78 | |
| 10.2930 | 16.6250 | 7.0312 | 1.5000 | 820000 | | | 90100 | 51200 | 157000 | | |

| Part Number | | Dimensions | | | | | | Pin | | | Geometry Factors | | | Bearing Weight kg |
|-------------|------------|---|--------------------------------------|---|--------------------------------------|----------------|----------------|----------------|----------------|----------------|------------------|--|--|-------------------|
| Inner | Outer | Max. Shaft Fillet Radius R ₁ | Backing Shoulder Dia. d ₁ | Max. Housing Fillet Radius r ₁ | Backing Shoulder Dia. D ₁ | K ₁ | K ₂ | G ₁ | G ₂ | C ₁ | C ₂ | | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | | | |
| HM252349 | HM252310CD | 6.8 | 292.8 | 1.5 | 486.8 | 28.38 | 11.81 | 1931.8 | 152.3 | 0.1498 | 87.21 | | | |
| | | 0.27 | 11.50 | 0.06 | 15.73 | 1.13 | 0.47 | | | | 152.28 | | | |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952362410 |
| Diam. intérieur | 260.35 mm |
| Diam. extérieur | 422.275 mm |
| Épaisseur | 178.592 mm |
| Conditionnement | 1 |

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE