


Roulement à aiguilles GBRI487232-UU-IKO - GBRI487232-UU-IKO

<https://www.123roulement.be/roulement-palier/roulement-aiguilles/aiguilles/gbri487232-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

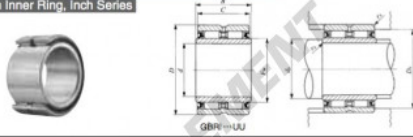

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
76.200 (3)	GBRI 487232 UU		1 880	76.200 (3)	114.300 (4 1/2)	50.800 (2)			
B	F _w	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min.	Max.	D _s Max.					r _{as} max. ⁽¹⁾
51.050	88.900 (3 1/2)	83.5	86	106.3	1.5	170 000	347 000	900	LRBZ 485632

Note⁽¹⁾ Minimum allowable value of chamfer dimension r
 Note⁽²⁾ Allowable rotational speed applies to grease lubrication.
 Remark: This outer ring has an oil groove and an oil hole.
 2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383606
Diam. intérieur	76.2 mm
Diam. extérieur	114.3 mm
Épaisseur	50.8 mm
Conditionnement	1
Norme	Sans norme

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE