


## Galet de came avec axe CF8-R-IKO - CF8-R-IKO

<https://www.123roulement.be/roulement-palier/roulement-bille/galet-came-axe/cf8-r-iko>



### CAM FOLLOWERS

Standard Type Cam Followers With Cage/With Screwdriver Slot

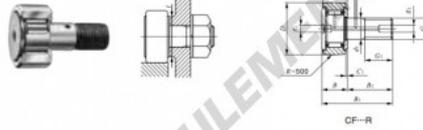

Stud dia. mm	Identification number				Mass (Ref.)				
	Shield type		Sealed type		g	D	C	d <sub>1</sub>	G
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring					
8	CF	B	R		28.5	19	11	8	M 8×1.25

Boundary dimensions mm													
G <sub>1</sub>	B	B <sub>1</sub>	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	g <sub>1</sub>	g <sub>2</sub>	f <sub>max</sub> (°)	f Min. mm	Maximum ignoring torque N·m	Ball dynamic load rating C N	Ball static load rating C <sub>0</sub> N	Maximum allowable static load N
10	12.2max	32.2max	20	—	0.6	*4	—	0.3	13	6.5	4 250	4 740	4 620

## CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952440996
Diam. intérieur	8 mm
Diam. extérieur	19 mm
Épaisseur	11 mm
Poids	40 g
Conditionnement	-
Norme	Sans norme

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE