


Galet de came avec axe CFE16-VBR-IKO - CFE16-VBR-IKO

<https://www.123roulement.be/roulement-palier/roulement-bille/galet-came-axe/cfe16-vbr-iko>

IKO
CAM FOLLOWERS
Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

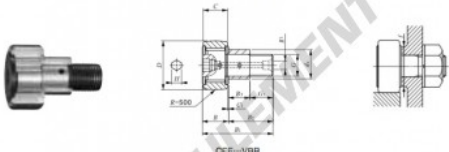

Outside diameter of eccentric roller mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d _e
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
22	CFE 16	VBR			193	35	18	22

Boundary dimensions mm										
G	B ₃	B ₁ max	B ₂ max	B ₂	C ₁	G ₁	H	H _{max} (*)	f Min. mm	Mounting dimension Maximun splining torque N·m
M16 X 1.5	15.5	19.6	52.1	32.5	0.8	6	17	6	0.6/0.8	26

Basic dynamic load rating C	Basic static load rating C ₀	Maximum allowable static load
N	N	N
20 700	37 600	23 200

CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060460547
Diam. intérieur	22 mm
Diam. extérieur	35 mm
Épaisseur	18 mm
Poids	193 g
Conditionnement	1

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE