


## Galet de came avec axe CFE24-VB-IKO - CFE24-VB-IKO

<https://www.123roulement.be/roulement-palier/roulement-bille/galet-came-axe/cfe24-vb-iko>

**IKO**  
**CAM FOLLOWERS**  
Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

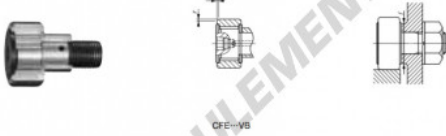

Outside diameter of eccentric roller mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d <sub>e</sub>
33	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	900	62	29	33
	<b>CFE 24 VB</b>							

Boundary dimensions, mm										Mounting dimension f mm	Maximum splining torque N·m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N	
G	B <sub>3</sub>	B max	B <sub>1</sub> max	B <sub>2</sub>	C <sub>1</sub>	G <sub>1</sub>	H	H <sub>1</sub>	Eccentricity g						
M24×1.5	25.5	30.6	80.1	49.5	0.8	8	24	12	1	0.8	40	215	46 600	92 000	52 000

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060460691
Diam. intérieur	33 mm
Diam. intérieur	1.299" inch
Diam. extérieur	62 mm
Diam. extérieur	2.441" inch
Epaisseur	29 mm
Epaisseur	1.142" inch
Poids	900 g
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE