


## Galet de came avec axe CFE16-VR-IKO - CFE16-VR-IKO

<https://www.123roulement.be/roulement-palier/roulement-bille/galet-came-axe/cfe16-vr-iko>

**IKO**  
**CAM FOLLOWERS**  
Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

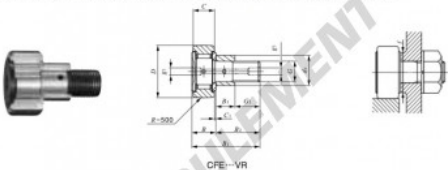

Outside diameter of eccentric axle mm	Identification number				Mass (Ref.)									
	Shield type		Sealed type		g	D	C	d <sub>e</sub>						
22	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	193	35	18	22						
CFE 16 VR														
Boundary dimensions mm														
G	B <sub>3</sub>	B <sub>max</sub>	B <sub>2</sub> max	B <sub>2</sub>	C <sub>1</sub>	g <sub>1</sub>	G <sub>1</sub>	r <sub>1</sub> min	Excentricity E	Mounting dimension f Min. mm	Maximum operating torque N·m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N
M16 x 1.5	15.5	19.6	52.1	32.5	0.8	6	17	0.6	0.8	26	58.5	20 700	37 600	23 200

## CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3616060461094
Diam. intérieur	22 mm
Diam. extérieur	35 mm
Épaisseur	18 mm
Poids	193 g
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE