

Rotule TAPR DGIHN-KL-12LO-DURBAL - GIHN-KL-12LO-DURBAL


<https://www.123roulement.be/roulement-palier/rotule/tapr/gihn-kl-12lo-durbal>

DGIHN-KL-12LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

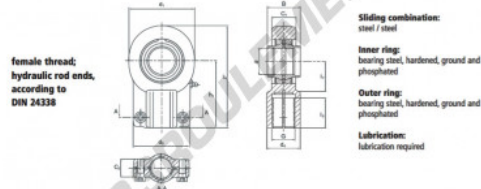

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and
phosphated
Outer ring:
bearing steel, hardened, ground and
phosphated
Lubrication:
lubrication required

order number	d	d ₁	measurement [mm]				B	C ₁	C ₂
right hand thread	12	32	G	d ₂	h	12	11	11	
DGIHN-KL 12 LO*			M 12 x 1,25	16,5					

type	l ₁ min	measurement [mm]		l ₂	load rating C ₀ [N]	weight [kg]
DGIHN-K / DGIHN-KL 12 LO*	17	38	54,0	14	24,5	0,10

CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952500041
Diam. intérieur	12 mm
Diam. extérieur	32 mm
Épaisseur	11 mm
Type	TAPR
Poids	100 g
Filetage	Filetage à gauche
Lubrification	avec
Conditionnement	1

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE