

## Rotule TAPR GIHN-KL-40LO-DURBAL - GIHN-KL-40LO-DURBAL


<https://www.123roulement.be/roulement-palier/rotule/tapr/gihn-kl-40lo-durbal>

### GIHN-KL-40LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE... LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

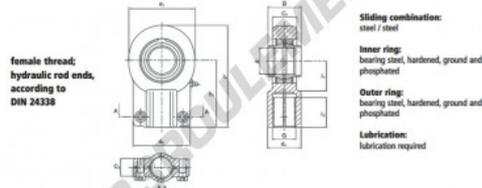

female thread; hydraulic rod ends, according to DIN 24338

Sliding combination: steel / steel  
Inner ring: bearing steel, hardened, ground and phosphated  
Outer ring: bearing steel, hardened, ground and phosphated  
Lubrication: lubrication required

order number	d	d <sub>1</sub>	measurement [mm]	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>	
GIHN-KL 40 LO	40	90	M 33 x 2	47,0	80	40	33	26

type	l <sub>1</sub> min	measurement [mm]	l <sub>2</sub>	l <sub>3</sub>	load rating C <sub>0</sub> [kN]	weight [kg]
GIHN-K / GIHN-KL 40 LO	46	97	146,0	41	204,0	2,10

## CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952500232
Diam. intérieur	40 mm
Diam. intérieur	1.575" inch
Diam. extérieur	90 mm
Diam. extérieur	3.543" inch
Epaisseur	33 mm
Epaisseur	1.299" inch
Type	TAPR
Poids	2100 g
Filetage	Filetage à gauche
Lubrification	avec
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE