


## Roulement conique JP8049-JP8010-TIMKEN - JP8049-JP8010-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/jp8049-jp8010-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

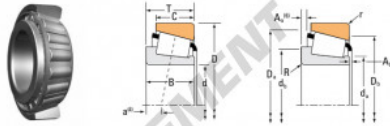

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(1)</sup> Y	Dynamic <sup>(2)</sup> C <sub>2</sub>	Factor <sup>(2)</sup> X	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
80.000 3.1496	125.000 4.9213	24.000 0.9449	107000 24200	1.10	1.23	27700 6200	29400 6626	1.23	149000 37800	JP8049 JP8010

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage	G <sub>1</sub>	G <sub>2</sub>		C <sub>3</sub>
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max. Shaft Fillet Radius R <sup>(1)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max. Housing Fillet Radius r <sup>(1)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>(1)</sup>	A <sub>2</sub> <sup>(1)</sup>	A <sub>3</sub> <sup>(1)</sup>				G <sub>1</sub>	
22.500 0.8858	17.500 0.6889	2.3 0.09	2.6 0.08	86.6 3.39	85.8 3.35	2.6 0.08	126.8 4.72	116.0 4.53	1.9 0.07	3.5 0.14	65.7	37.4	0.1065	0.96 2.10

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3616060008688
Diam. intérieur	80 mm
Diam. extérieur	125 mm
Épaisseur	21 mm
Poids	960 g
Conditionnement	1
Norme	Sans norme

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE