


## Roulement à rouleaux NN3010K-JTEKT - NN3010K-JTEKT

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/rouleaux/nn3010k-jtekt>

Double-row cylindrical roller bearings ——— Koyo

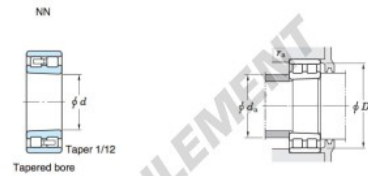

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r <sub>min</sub>	F <sub>w</sub>	C <sub>10</sub>	C <sub>90</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
50	80	23	1	72.5	52.8	72.6	7 600	9 100	NN	NN3010K

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	d <sub>a</sub>		D <sub>a</sub>		r <sub>a</sub>		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		55	—	—	75	74	1	0.429	0.415

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473642
Diam. intérieur	50 mm
Diam. extérieur	80 mm
Épaisseur	23 mm
Poids	415 g
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE