


Roulement à rouleaux NN3019K-JTEKT - NN3019K-JTEKT

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/rouleaux/nn3019k-jtekt>

Double-row cylindrical roller bearings ——— Koyo

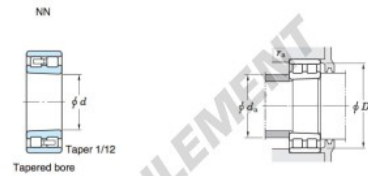

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No.		
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> _{min.}	<i>F</i> _w	<i>E</i> _w	<i>C</i> _r	<i>C</i> _{0r}	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
95	145	37	1.5	—	132	150	246	4 100	4 900	—	—

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	<i>d</i> _a		<i>D</i> _a		<i>r</i> _a		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
—	—	103	—	—	137	134	1.5	2.17	2.10

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473819
Diam. intérieur	95 mm
Diam. extérieur	145 mm
Épaisseur	37 mm
Poids	2100 g
Conditionnement	1

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE