


## Roulement à rouleaux NN3020K-JTEKT - NN3020K-JTEKT

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/rouleaux/nn3020k-jtekt>

### Double-row cylindrical roller bearings

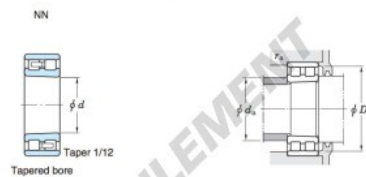

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> <sub>min</sub>	<i>F</i> <sub>0</sub>	<i>C</i> <sub>0</sub>	<i>C</i> <sub>10</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
100	150	37	1.5	—	137	157	265	3 900	4 700	NN3020K

		Mounting dimensions (mm)					(Refer.) Mass (kg)		
Cylindrical bore	Tapered bore	<i>d</i> <sub>a</sub>		<i>D</i> <sub>a</sub>		<i>r</i> <sub>a</sub>	Cylindrical bore	Tapered bore	
		min.	max.	min.	max.				
		108	—	—	142	139	1.5	2.28	2.21

## CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473857
Diam. intérieur	100 mm
Diam. extérieur	150 mm
Épaisseur	37 mm
Poids	2210 g
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE