
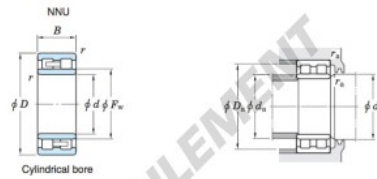


## Roulement à rouleaux NNU4964-JTEKT - NNU4964-JTEKT

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/rouleaux/nnu4964-jtekt>

Double-row cylindrical roller bearings 



Boundary dimensions (mm)				Basic load ratings (kN)				Limiting speeds (min <sup>-1</sup> )		Bearing No. NN	
$d$	$D$	$B$	$r$ min.	$F_w$	$E_w$	$C_r$	$C_{0r}$	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
320	440	118	3	352	—	1 220	2 750	1 100	1 300		

Mounting dimensions (mm)		Mounting dimensions (mm)				(Refer.) Mass (kg)			
NUU	NUU	$d_a$ min.	$d_a$ max.	$d_a$ min.	$d_a$ max.	$D_a$ min.	$r_a$ max.	Cylindrical bore	Tapered bore
Cylindrical bore	Tapered bore	333	348	363	427	—	2.5	53.7	51.4

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952474021
Diam. intérieur	320 mm
Diam. intérieur	12.598" inch
Diam. extérieur	440 mm
Diam. extérieur	17.323" inch
Epaisseur	118 mm
Epaisseur	4.646" inch
Poids	53700 g
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE