
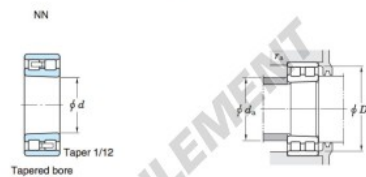


Roulement à rouleaux NN3068K-JTEKT - NN3068K-JTEKT

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/rouleaux/nn3068k-jtekt>

Double-row cylindrical roller bearings 



Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No.	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> min.	<i>F_w</i>	<i>C_r</i>	<i>C_{0r}</i>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
340	520	133	5	—	473	1 580	3 090	880	1 100	NN3068K

		Mounting dimensions (mm)						(Refer.) Mass (kg)	
Cylindrical bore	Tapered bore	<i>d_a</i>		<i>D_a</i>		<i>r_a</i>		Cylindrical bore	Tapered bore
		min.	max.	min.	max.	min.	max.		
		360	—	—	500	477	4	101	97.8

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952474090
Diam. intérieur	340 mm
Diam. extérieur	520 mm
Épaisseur	133 mm
Poids	97800 g
Conditionnement	1

contact@123roulement.be

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE