


## Roulement conique 6581X-6525X-TIMKEN - 6581X-6525X-TIMKEN

<https://www.123roulement.be/roulement-palier/roulement-rouleaux/conique/6581x-6525x-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

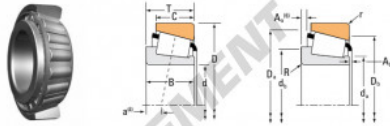

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>1)</sup> C <sub>1</sub>	Factor <sup>2)</sup> Y	Dynamic <sup>3)</sup> C <sub>2</sub>	Factor <sup>4)</sup> X	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
90.000	160.000	55.519	42900	2.40	114000	26900	1.48	52300	6581X	6525X
3.5433	6.2992	2.1750	16600		25600	13900		118000		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
Width B	Width C	ER. Dr. α <sup>1)</sup>	Max. Shaft Fillet Radius R <sup>2)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max. Housing Fillet Radius r <sup>3)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>4)</sup>	A <sub>2</sub> <sup>5)</sup>	Cage					
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm					
55.189	44.490	-13.2	3.8	192.0	195.0	3.8	153.4	141.0	4.1	8.9	158.6	35.5	0.1037	4.49
2.1693	1.7500	-0.52	0.12	4.02	4.29	0.12	6.04	5.55	0.16	0.04				8.89

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952285504
Diam. intérieur	90 mm
Diam. intérieur	3.543" inch
Diam. extérieur	160 mm
Diam. extérieur	6.299" inch
Epaisseur	55.1 mm
Epaisseur	2.169" inch
Poids	4490 g
Conditionnement	1

[contact@123roulement.be](mailto:contact@123roulement.be)

02 808 18 02

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE